

Enquiry please quote Order please process

Date _____

Contact Details

Ordered by _____
 Company Name _____
 Address _____
 _____ Postcode _____
 Telephone _____
 Fax _____
 Email _____
 Order No. _____ Your Reference _____
 Delivery Date Requested _____

Site Contact

Contact Name _____
 Delivery Address _____
 _____ Postcode _____
 Telephone _____

Delivery Option

Fully assembled with outer frame joints sealed
 Kit form

Overall Frame Width (mm) _____
 Overall Frame Height (mm) _____

Doors will be fitted in:

Sheltered Location Exposed Location

Opening Direction: Inward Outward

Cill requirements included in overall frame height

150mm 190mm No cill required

Note: Cill platform height is 20mm included in the overall height

Glazing

28mm, Toughened, Low E, Argon Filled, Black Warm Edge Spacer as standard

Glazed Unglazed

28mm Square bead as standard

48mm square bead for triple glazing

Door has to comply with Document Q of the building regulations (additional costs apply)
Note: 3-2-1, 4-1-3, 6-1-5, and 6-3-3 do not comply

Keyed Alike
 Touch-up pot

Bottom track detail

63mm standard threshold - with full weather rating
 30mm low threshold - not recommended in exposed locations

Single Colours

RAL 9910 Hippca Gloss White
 RAL 7016 Anthracite Matt Grey
 RAL 9005 Matt Black

Dual Colours

RAL 7016 Anthracite Grey Matt Outside / RAL 9910 Hippca Gloss White Inside

Note: Other single and dual colours available on request

Marine Grade Paint Required Yes No

Trickle vents through a 40mm add-on

No Black White Grey

Internal Bifold Yes Note: If bifold is internal, no drainage required

Master Lever / Lever Handle

White Black Satin Chrome

Shootbolt Lever Handle/s

White Black Satin Chrome

Opening configuration - viewed from outside



Sketch Your Door




Features and Benefits


- 1,2,3,4,5,6 or 7 Panel options, opening in or out.
- Traffic door option combined with folding panels
- 3 Single Colour and 2 Dual Colour options from stock
- Master and Intermediate locking Lever handle in four finishes
- 28mm glazing with square bead as standard with a U Value of 1.7
- 44mm Triple Glazing option with Square Bead U Value of 1.3
- Marine grade paint finish available
- Choice of 2 Thresholds 63mm and 30mm - both weather tested
- 63mm BS 6375-1:2015 Weather tightness
- Water 600pa, Air 600pa, Wind 1200pa
- 30mm BS 6375-1:2015 Weather tightness
- Water 150pa, Air 600pa, Wind 1200pa
- Doors can comply with Document Q of the building regulations (additional costs apply for the PAS 24:2016 specification door)
- Doors that can't comply with PAS 24 as they require a fingerbolt are as follows: 3-2-1, 4-1-3, 6-1-5 and 6-3-3

Configuration Options

All style numbers shown below can be manufactured to open in the opposite direction. For example, style 3-2-1 can be reverse handed to 3-1-2

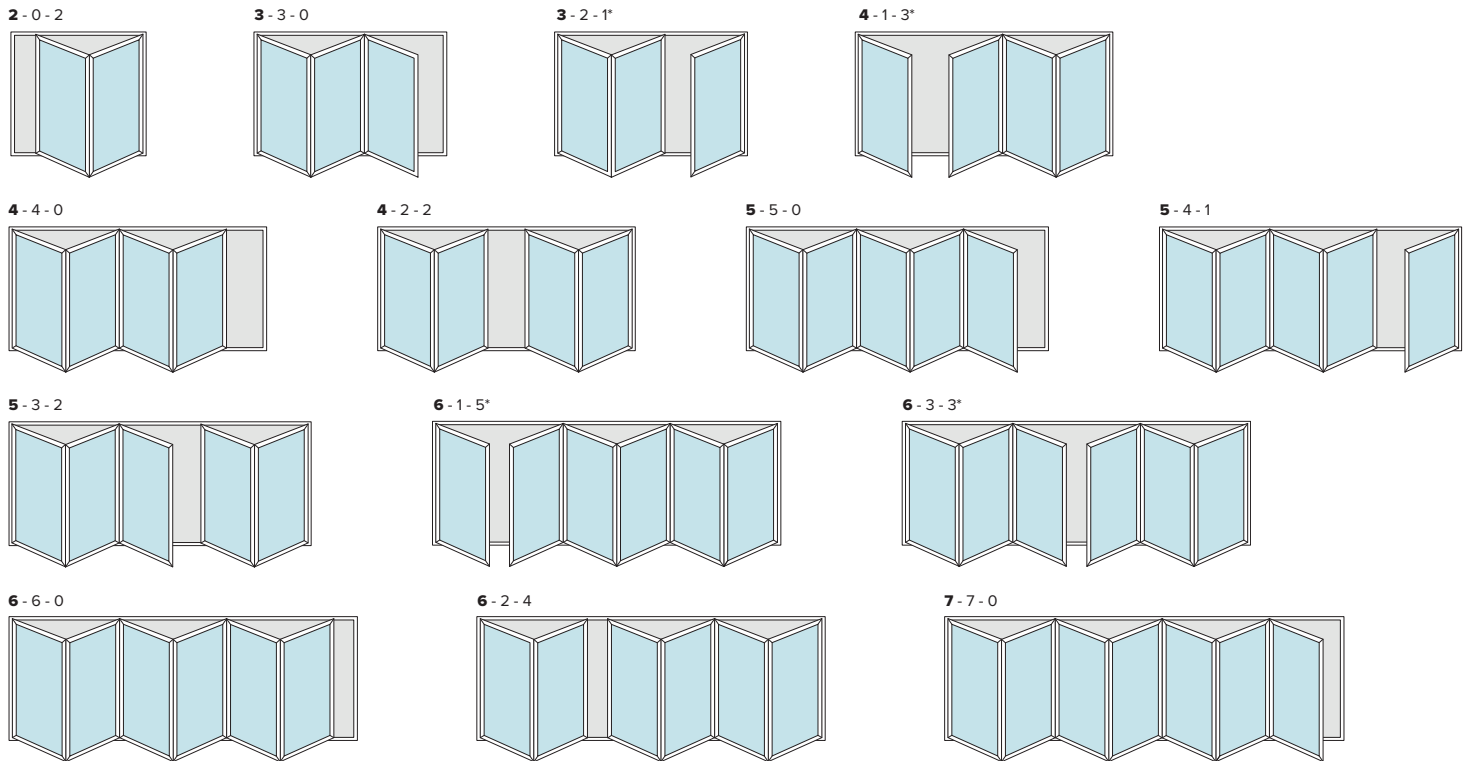


SPW230231
Outerframe




PUR235NT
Low threshold




SPW252233
Flat Faced Door Stile



SPW6024024X
40mm Add-On



PUR018
Bead



SPW751753
150mm Cill

